

Protect Downstream Equipment

AMERICAN MADE.

GASKET STRAINER

WITH SCREEN TO PROTECT DOWNSTREAM EQUIPMENT

HIGHLIGHTS

- Protect downstream equipment from dangerous debris such as loose scale, weld beads, grit, metal shavings, PTFE and other damaging foreign material
- Inexpensive protection for meters, regulators, valves, pumps and other mechanical equipment
- Highly effective, point of use protection

FEATURES

- Wafer installation, easy to install between two flanges
- Quality construction, stainless steel screen and high quality gasket
- Unit is a functional gasket
- Available in a range of filtration options (from coarse to fine)

SPECIFICATIONS

Sizes: ¾" thru 30"

Style: Ring or Full Face


Pressure Class: 150, 300 or custom

Mesh: 20 Mesh thru 120 Mesh, double meshes, or perforated metal

Optional Visual Indicator: Nameplate or Tab

Thickness: 1/8" Standard (other options available upon request)

Gasket: Garlock BlueGuard 3000 Standard (other options available upon request)

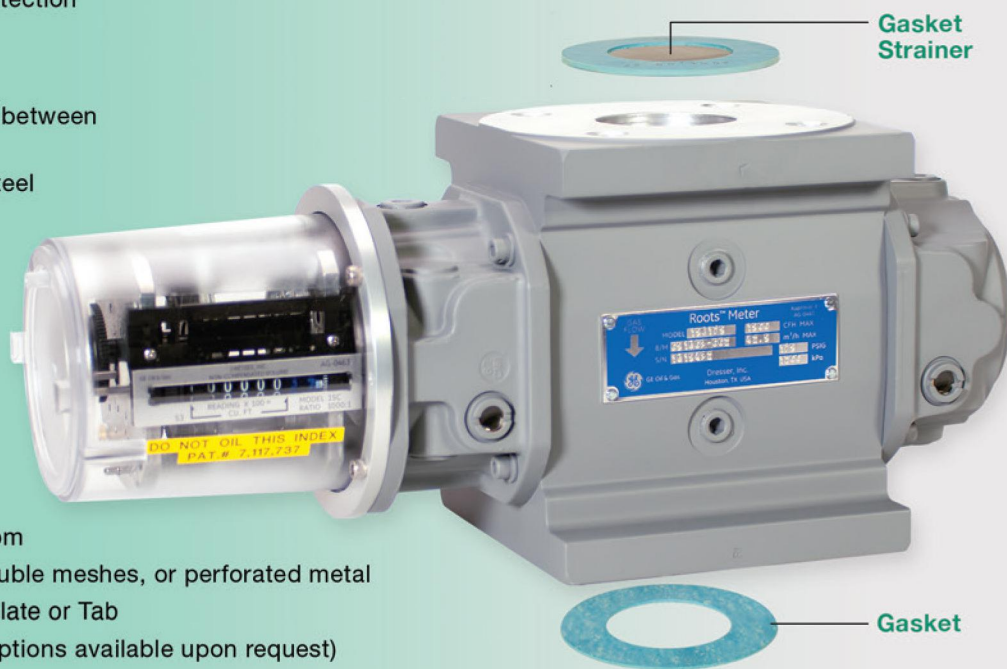


**PROCESS VALVE
& EQUIPMENT CO.**

7205 Chagrin Road
Chagrin Falls, OH 44023
PH: 440-247-6111
FX: 440-247-7305
TOLL FREE: 1-800-922-8897



FULL-FACE GASKET

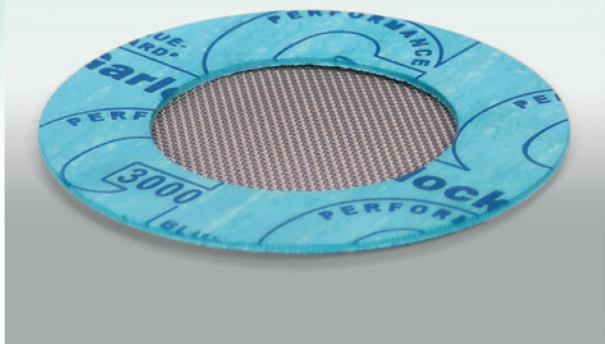


RING GASKET

MESH SPECS

ACTUAL SIZE


**3/16"
DIAMETER
PERFORATED**

51% Open Area
0.1875" Openings




20 MESH

46.20% Open Area
.0160" Diameter Wire
0.034" Openings




40 MESH

36.00% Open Area
.0100" Diameter Wire
0.015" Openings




60 MESH

30.50% Open Area
.0075" Diameter Wire
0.009" Openings



80 MESH

31.40% Open Area
.0055" Diameter Wire
0.007" Openings



100 MESH

30.30% Open Area
.0045" Diameter Wire
0.006" Openings

